

### MAXIMUM CHARACTERISTICS

**PAIRS PROTECTED:**

1/2, 4/5, 3/6, 7/8

**PINS PROTECTED:**

ALL 8, L-L & L-G

**TURN ON (@10mA):**

±70Vdc TYPICAL, L-L & L-G

**SERIES RESISTANCE:**

<0.02Ω

**TYPICAL CAPACITANCE:**

60pF, L-L & L-G

**MAX SURGE:**

100A; 10/1000 USEC (BELLCORE 1089), L-L & L-G

**HUMIDITY:**

0 TO 100% CONDENSING

**TEMPERATURE:**


-40°C TO +85°C STORAGE/OPERATING

**APPLICATION:**

INDOOR, RJ45, STP


**TYPICAL WEIGHT:**

0.2 lb.

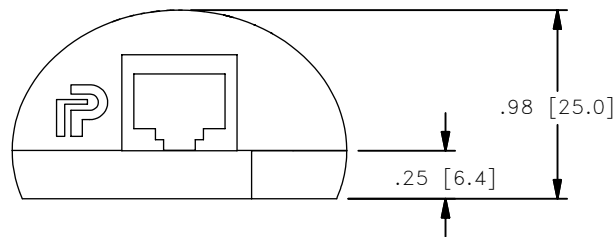

**NOTES:**

- GROUND UNIT USING ATTACHED RING TERMINAL TO NEAREST POINT.

DRAWN BY <b>R. SWART</b>	DATE <b>04/29/05</b>	 P.O. BOX 9000 MINDEN, NV 89423 TEL: 775.782.2511 FAX: 775.782.4476 <b>NX2-60</b> <b>CUSTOMER PRINT</b>	UNLESS OTHERWISE STATED DIMENSIONS ARE IN INCHES <b>TOLERANCES</b> SURFACE FINISH = 63μin ANGLES = ±.5° .X = ±.05 .XX = ±.03 .XXX = ±.01 .XXXX = ±.005 DO NOT SCALE DRAWING			
MECH ENG <b>R. DUNNING</b>	DATE <b>05/16/05</b>					
ELEC ENG <b>L. CHANG</b>	DATE <b>05/11/05</b>					
Q.A. DEPT <b>L. JACQUES</b>	DATE <b>05/11/05</b>					
MKT DEPT <b>S. DOTTER</b>	DATE <b>05/13/05</b>					
REV	DESCRIPTION	DATE	SCALE 1/1	PAGE 1 OF 1	FILE TAG -C1	CAGE CODE 61114