
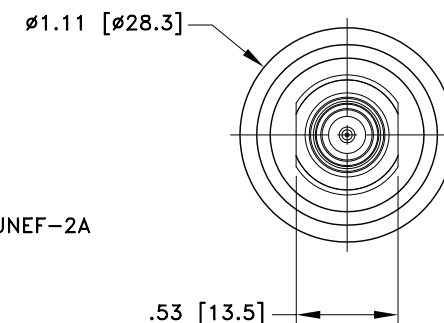
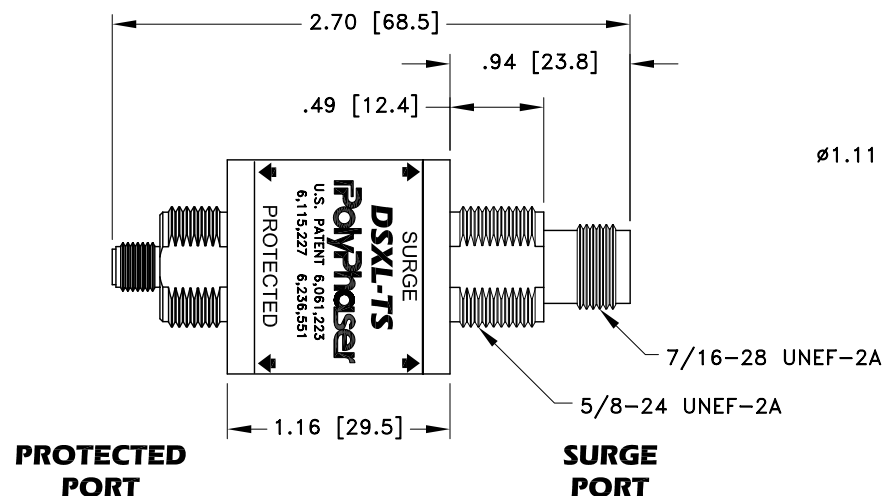
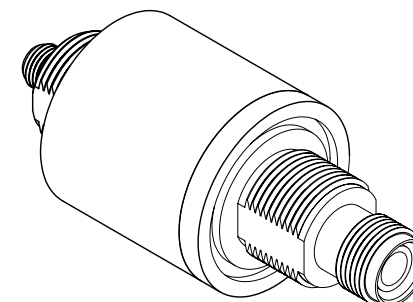


ALL DESIGN, OPERATIVE AND PROCESS DATA PERTAINING TO THE ARTICLE SHOWN ON THIS SHEET IS THE PROPERTY OF POLYPHASE CORPORATION. THE INFORMATION IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR APPROPRIATED BY OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF POLYPHASE CORPORATION.

REVISIONS

REV	LTR	DATE	ENG	MKTG	Q.A.
-----	-----	------	-----	------	------

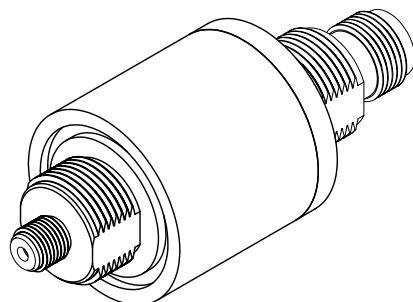

MAXIMUM CHARACTERISTICS

APPLICATION:

BULKHEAD MOUNT
WEATHERPROOF WHEN INSTALLED

SURGE:

18kA IEC 1000-4-5 8/20μs WAVEFORM

FREQUENCY RANGE:

800MHz TO 2.3GHz
(700MHz TO 2.7 GHz @ 1.2:1 VSWR)

VSWR:

≤1.1:1 TYPICAL

INSERTION LOSS:

≤0.1dB

CONTINUOUS POWER:

300W@920MHz

LET THROUGH VOLTAGE:

≤±3 VOLTS FOR 3kA @ 8/20μs WAVEFORM

THROUGHPUT ENERGY:

≤0.5μJ FOR 3kA @ 8/20μs WAVEFORM

TEMPERATURE:

-40°C TO +85°C STORAGE/OPERATING

VIBRATION:

1G AT 5Hz TO 100Hz

ENVIRONMENTAL:

MEETS IEC 60529 IP65

MEETS BELLCORE #TA-NWT-000487

PROCEDURE 4.11, WIND DRIVEN (120MPH)

RAIN INTRUSION TEST.

CUSTOMER APPROVAL: _____ DATE: _____

ALL DIMENSIONS SHOWN ABOVE ARE FOR REFERENCE ONLY.

DRAFTER S. HALL	DATE 04/14/03	 P.O. BOX 9000 MINDEN, NV 89423 TEL: 775-782-2511 FAX: 775-782-4476 DWG NO/PART NO/DESCRIPTION DSXL-TS CUSTOMER PRINT		
MECH ENGINEER R. DUNNING	DATE 04/14/03			
ELEC ENGINEER J. JONES	DATE 04/14/03			
MARKETING S. DOTTER	DATE 04/15/03			
QUALITY DEPT L. JACQUES	DATE 04/15/03			
CAGE CODE 61114	FILE NAME -C1	SCALE 1/1	SHEET 1 OF 1	